




QM-MOTOLAM: High-durability PVC pressure sensitive laminate film

PVC pressure sensitive laminate film that provides exceptional scratch and scuff durability due to MOTOLAM's increased density and thickness. MOTOLAM contains outstanding UV inhibiting coating making your graphics stay vibrant for longer periods of time. MOTOLAM is a unique PVC vinyl developed for fleet graphics, motorcycles, and boats. MOTOLAM has a low surface energy adhesive which prevents laminating prints from splitting after contact.

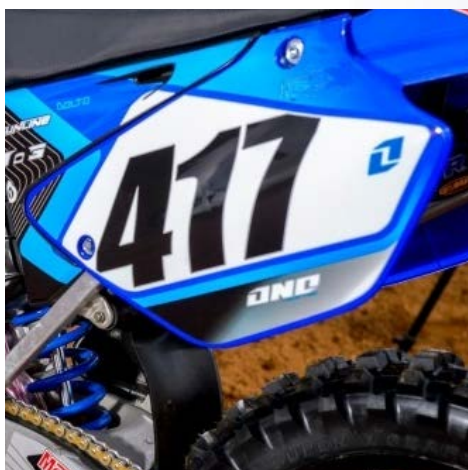

Benefits:

- LSE High-tack Adhesive.
- Extremely Heavy PVC Base Adding 13mil of Protection
- UV Inhibiting Coating to Prevent Inks Fading.
- Ultra-clear High-gloss Finish

Applications:

- Motocross/Motorsports for Durable Graphics
- Outdoor Display
- Vehicle Graphics
- Laminated Menus

TECHNICAL DATA:

SURFACE FINISH:	Clear Gloss	WHITENESS:	N/A (CIE Ganz)
BASE MATERIAL:	Calendared Monomeric PVC	GLOSS MEASUREMENT:	53 +/- 10% by angle of 60°
ADHESIVE MATERIAL:	Permanent High Tack LSE	DURABILITY:	Indoor: Up to 1 year Outdoor: Up to 6 months
LINER MATERIAL:	Single PE coated paper	STORAGE:	Up to 1 year if stored in proper conditions (cool, dry place 50-80°)
LINER WEIGHT:	106 GSM +/- 10%	ROLL LENGTH:	150 Ft.
LINER CALIPER:	4.3 Mil +/- 1	ROLL WIDTHS:	54"
FACE STOCK WEIGHT:	220 GSM +/- 10%	CORE:	3"
FACE STOCK CALIPER:	15 Mil +/- 1	PRINT SIDE:	Print Side Out
BRIGHTNESS:	N/A (ISO Blue Whiteness)	INK RECOMMENDATIONS:	N/A



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly. Storage: Up to one year if stored in proper conditions (cool, dry place 50-80°)

